

APPARATUS AND METHOD FOR LOW POWER ROUTING OF SIGNALS IN A LOW VOLTAGE DIFFERENTIAL SIGNALING SYSTEM

This application claims priority to the provisional patent application entitled, "Apparatus and Method for Routing Signals in a Low Voltage Differential Signaling System", Serial Number 60/125,498, filed March 22, 1999.

5

BRIEF DESCRIPTION OF THE INVENTION

This invention relates generally to transporting data in digital systems. More particularly, this invention relates to a low power technique for multiplexing and demultiplexing signals in a Low Voltage Differential Signaling (LVDS) system.

10

BACKGROUND OF THE INVENTION

Low Voltage Differential Signaling (LVDS) is a low swing, differential signaling technology that facilitates high speed data transmission. Its low swing and current mode driver outputs create low noise and consume relatively little power.

Figure 1 illustrates a prior art LVDS driver 20 and receiver 22 connected via differential lines 25. A 100 Ohm differential impedance 26 is placed between the lines 25. The driver 20 includes a current source 27 that drives one of the differential lines 25. The receiver 24 has a high DC impedance (it does not source or sink DC current), so the majority of driver current flows across the 100 Ohm termination resistor 26 generating, in this embodiment, approximately 350mV across the inputs of the receiver 24. When the opposite transistors of the driver 22 (the "-" transistors instead of the "+" transistors) are activated, current flows in the opposite direction. In this way, valid digital high and low states are transported.

The differential data transmission method used in LVDS is less susceptible to common-mode noise than single-ended schemes. Differential transmission conveys information using two wires with opposite current/voltage swings, instead of one wire used in single-ended methods. The advantage of the differential approach is that noise is coupled onto the two wires in a common mode (the noise appears on both lines equally) and is thus rejected by the receiver 24, which looks only at the difference between the two signals. The differential signals also tend to radiate less noise than single-ended signals, due to the canceling of magnetic fields. In addition, the current mode drive is not prone to ringing and switching spikes, thereby further reducing noise.

Since LVDS reduces concerns about noise, it can use lower signal voltage swings. This advantage is crucial, because it is impossible to raise data rates and lower power consumption without using low voltage swings. The low swing nature of the driver means data can be switched very quickly. Since the driver is also current mode, very low power consumption across frequency is achieved since the power consumed by the load is substantially constant.

Figure 2 illustrates an LVDS communication system 30 including a transmitter 32 and a receiver 34 linked by a channel 35. The transmitter 32 multiplexes a large number of channels (e.g., 21 or 28) onto the smaller width channel 35 (e.g., having 4 or 5 channels). A serializer or multiplexer 36 is used to perform this function. The opposite function is performed at the receiver 34. That is, a de-serializer or de-multiplexer 38 takes the signals from the smaller width channel 35 and applies them across a large number of channels (e.g., 21 or 28). The relatively small channel 35 is used to reduce board, connector, and/or cable costs. This technique also lowers power, noise, and electro-magnetic interference.

Figure 3 illustrates a prior art multiplexer 36 with four parallel-load shift registers (register banks) 40A-40D. Register banks 40A-40D respectively receive signals from buses 41A-41D. Register banks 40A-40D respectively drive differential output signals to differential output drivers 42A-42D.

A control logic circuit 43 and a clock/phase locked loop circuit 44 are connected to a control signal bus 45. The clock/phase locked loop circuit 44 receives a standard rate clock signal and produces a clock signal at seven times the standard rate.

This faster clock signal is applied to the control signal bus 45 to drive each register bank 40. The standard clock signal is applied to the output clock differential driver 42E.

In the disclosed embodiment, each bus 41 carries seven signals which are transmitted at seven times the standard clock rate over each LVDS channel 42A-42D. Since the multiplexing and de-multiplexing operations are complementary, only multiplexing operations are discussed, however it should be understood that the invention covers both multiplexing and de-multiplexing operations.

There are a number of problems associated with the multiplexer 36 of Figure 3. Since the multiplexer 36 operates at seven times the speed of the system clock, it consumes a relatively large amount of power. In addition, it is relatively difficult to generate and distribute the higher speed clock.

In view of the foregoing, it would be highly desirable to provide an improved signal control technique for use in LVDS systems. Ideally, such a system would have a relatively simple clock architecture and would operate in a lower power mode.

SUMMARY OF THE INVENTION

The invention includes a signal routing apparatus with a register bank to store a set of data signals. A delay locked loop generates a set of phase displaced clock signals. A phase controlled read circuit sequentially routes the set of data signals from the register bank in response to the phase displaced clock signals. A Low Voltage Differential Signaling buffer connected to the phase controlled read circuit transmits the data signals in a Low Voltage Differential Signaling mode.

The invention includes a method of routing signals. Data signals are stored. Phase displaced clock signals are generated. The data signals are sequentially routed in response to the phase displaced clock signals to form sequentially routed signals. Low Voltage Differential Signaling mode signals corresponding to the sequentially routed signals are then transmitted.

The invention establishes an improved signal control technique for use in Low Voltage Differential Signaling systems. Advantageously, the delay locked loop provides a relatively simple clock architecture that facilitates low power mode

operation, as the phase displaced signals are used in lieu of a higher frequency clock signal.

BRIEF DESCRIPTION OF THE DRAWINGS

5 For a better understanding of the invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates an LVDS driver and receiver in accordance with the prior art.

10 FIGURE 2 illustrates an LVDS transport system in accordance with the prior art.

FIGURE 3 illustrates a multiplexer for use in a prior art LVDS system.

FIGURE 4 illustrates the signal router of the invention positioned in a transmitting device in accordance with an embodiment of the invention.

15 FIGURE 5 illustrates a delay locked loop utilized in connection with the system of Figure 4.

FIGURE 6 illustrates a controller utilized in connection with the system of Figure 4.

20 FIGURE 7 illustrates a programmable logic device architecture incorporating the signal router of the invention.

FIGURE 8 illustrates transmitting and receiving LVDS programmable logic devices configured in accordance with the invention.

FIGURE 9 illustrates a digital system incorporating LVDS programmable logic devices of the invention.

25 FIGURE 10 illustrates the signal router of the invention positioned in a receiving device in accordance with an embodiment of the invention.

Like reference numerals refer to corresponding parts throughout the drawings.

DETAILED DESCRIPTION OF THE INVENTION

30 Figure 4 illustrates a signal router 50 constructed in accordance with an embodiment of the invention. The signal router 50 includes a register bank 52. In this embodiment, the register bank 52 loads eight data signals in parallel. A phase

controlled read circuit 54 sequentially routes the signals to a LVDS buffer 58, which subsequently applies the signals to a differential signaling channel 59.

The phase controlled read circuit 54 is controlled by a delay locked loop 56. The delay locked loop 56 receives an input clock signal and generates a set of eight phase displaced signals that are applied to the phase controlled read circuit 54. The delay locked loop 56 routes the input signal to a clock output buffer 60, which produces a differential output signal on differential signal lines 61.

Figure 5 illustrates the delay locked loop 56 generating a set of phase displaced signals 70. Each phase displaced signal is displaced from an adjacent phase displaced signal by 1/8 of a cycle.

The eight output clocks from the delay locked loop 56 are used to route the eight signals from the register bank 52. In other words, one clock signal from the delay locked loop 56 is assigned to each register of the register bank 52. Thus, a signal in a register bank is driven from the register bank 52 to the buffer 58 in response to its delay locked loop signal, resulting in the register bank driving a signal to the buffer 58 every 1/8 of a clock cycle.

Figure 6 illustrates a phase controlled read circuit 54 that may be used to accomplish this functionality. In Figure 6, q_1 through q_8 are the outputs from the register bank 52, while ϕ_1 through ϕ_8 are the outputs of the delay locked loop 56.

The operation of the controller 54 is appreciated with reference to a single column of transistors. For example, consider the first column of transistors on the left side of the circuit 54. Initially, the ϕ_1 signal is high and the ϕ_2 signal is low. The digital high ϕ_1 signal is inverted and therefore turns-on PMOS transistor 74, the digital low ϕ_2 signal turns-on PMOS transistor 76, the digital high ϕ_1 signal causes the NMOS transistor 78 to turn-on, while the inverted ϕ_2 signal has a digital high value and thereby causes the NMOS transistor 80 to turn-on.

In sum, transistors 74, 76, 78, and 80 are turned-on. The output on node 90 will now be determined by the states of transistors 82 and 84, which receive the input signal q_1 . If q_1 is a digital low value, then transistor 82 turns-on and transistor 84 remains off. Transistors 74, 76, and 78 drive a digital high signal onto the output node 90. Thus, transistors 74, 76, and 78 operate as a set of pull-up transistors.

Alternately, if q_1 has a digital high value, then transistor 82 is off and transistor 84 turns-on. Transistors 84, 78, and 80 pull the output node 90 to a digital low value. Thus, transistors 84, 78, and 80 operate as a set of pull-down transistors.

Observe that this operation occurs in the $1/8$ of a cycle while the ϕ_1 signal is high and the ϕ_2 signal is low. When ϕ_1 and ϕ_2 are both high, transistors 76 and 80 will be turned-off, thereby preventing the column of transistors from driving a signal on the output node 90. However, at this point, the next column of transistors is operative. This cascaded operation is repeated for each signal phase. The output node 90, which is connected to each column of transistors, operates as a hardwired logical OR circuit.

Observe that each register in the register bank 52 operates at the standard clock rate, not a multiple of the clock rate. Thus, the simplified clock scheme does not have to generate high clock speeds. This results in low power consumption. In addition, concerns regarding whether a process technology can support high frequency clock signals no longer apply. Only the LVDS buffer 58 is required to operate at the higher clock speed (e.g., 8 times the clock speed). The LVDS buffer may be implemented using a standard LVDS configuration, such as drivers 42 in Figure 3.

A multiplexer or de-multiplexer configuration is established by selecting the size of the register bank 52 and the corresponding delay locked loop 56 to drive the register bank 52. This flexible scheme is highly extendible to conform to the number of LVDS channels.

The router 50 may be used in any number of architectures. For example, the router 50 may be a discrete circuit embedded in a programmable logic device. Alternately, the router 50 may be implemented into the logical blocks of a programmable logic device. Figure 7 illustrates a programmable logic device 100. PLDs (sometimes referred to as PALs, PLAs, FPLAs, PLDs, EPLDs, EEPLDs, LCAs, or FPGAs) are well-known integrated circuits that provide the advantages of fixed integrated circuits with the flexibility of custom integrated circuits. Such devices allow a user to electrically program standard, off-the-shelf logic elements to meet a user's specific needs. See, for example, U.S. Patent Number 4,617,479, incorporated herein by reference for all purposes. Such devices are currently represented by, for example, Altera's MAX® series of PLDs and FLEX® series of PLDs. The former are

described in, for example, U.S. Patent Numbers 5,241,224 and 4,871,930, and the **Altera Data Book**, June 1999, all incorporated herein by reference. The latter are described in, for example, U.S. Patent Numbers 5,258,668; 5,260,610; 5,260,611; and 5,436,575, and the **Altera Data Book**, June 1999, all incorporated herein by reference.

5 The programmable logic device 100 includes a set of logic array blocks 102. Row interconnect circuitry 104 and column interconnect circuitry 106 link the various logic array blocks 102. Input/output elements 110 positioned at the ends of the row interconnect circuitry 104 and column interconnect circuitry 106 are used for input/output connections with external devices.

10 Figure 8 illustrates a programmable logic device 114 configured for LVDS transmission. The figure also illustrates a programmable logic device 116 configured for LVDS reception. A differential signal channel 115 connects the two devices. Each device may also receive Transistor-Transistor Logic (TTL) signals at signal pins that are not connected to the differential signal channel 115.

15 The PLDs 114 and 116 of Figure 8 may be incorporated into a larger digital system, as shown in Figure 9. Figure 9 illustrates a data processing system 120. The data processing system 120 may include one or more of the following components: a processor 124, a memory 126, input/output circuitry 128, and peripheral devices 130. These components are coupled together by a system bus 132 and are populated on a
20 circuit board 134, which is contained in an end-user system 136.

 The system 120 can be used in a wide variety of applications, such as computer networking, data networking, instrumentation, video processing, digital signal processing, or any other application where the advantage of using re-programmable logic is desirable. The PLDs 114 and 116 can be used to perform a variety of logic
25 functions. For example, they can be configured as a processor or controller that works in cooperation with processor 124. The PLDs 114 and 116 may also be used as an arbiter for arbitrating access to a shared resource in the system 120. In yet another example, the PLDs 114 and 116 can be configured as an interface between the processor 124 and one of the other components in the system 120. The PLDs 114 and
30 116 may communicate with the other elements of the system 120 using either TTL signaling or differential signaling.

The invention was described in the context of a transmitting device in which the contents of a register bank 52 are sequentially read in response to the phase delayed signals. Those skilled in the art will appreciate that the technique of the invention can also be used at a receiving device. In particular, the phase delayed
5 signals can be used to sequentially latch a set of received signals into a register bank. After all of the signals are received, the received signals can be loaded in parallel to an adjacent register bank and then be processed in a standard manner.

Figure 10 illustrates such a system. The receiving device 150 includes an LVDS buffer 152 to convert each received differential signal into a single ended
10 signal, which is applied to the phase controlled write circuit 154. The phase controlled write circuit 154 is a set of registers that sequentially loads received signals in response to the phase delayed signals from the DLL 156. Once the phase controlled write circuit is loaded, its contents can be written in parallel to the register bank 160.

The foregoing description, for purposes of explanation, used specific
15 nomenclature to provide a thorough understanding of the invention. However, it will be apparent to one skilled in the art that the specific details are not required in order to practice the invention. In other instances, well known circuits and devices are shown in block diagram form in order to avoid unnecessary distraction from the underlying invention. Thus, the foregoing descriptions of specific embodiments of the present
20 invention are presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, obviously many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others
25 skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

IN THE CLAIMS:

1. A signal routing apparatus, comprising:
a register bank to store a set of data signals;
5 a delay locked loop to generate a set of phase displaced clock signals;
a phase controlled read circuit to sequentially route said set of data signals
from said register bank in response to said phase displaced clock signals; and
a Low Voltage Differential Signaling buffer connected to said phase controlled
read circuit to transmit said data signals in a Low Voltage Differential Signaling mode.
10
2. The signal routing apparatus of claim 1 wherein said phase controlled read
circuit includes a set of transistor columns, each transistor column of said set of
transistor columns being responsive to two phase displaced clock signals of said set of
phase displaced clock signals.
15
3. The signal routing apparatus of claim 2 wherein each transistor column of said
set of transistor columns includes a subset of pull-up transistors connected to an output
node, said subset of pull-up transistors processing a first phase displaced clock signal,
a second phase displaced clock signal immediately adjacent to said first phase
20 displaced clock signal, and a register bank signal.
4. The signal routing apparatus of claim 3 wherein each transistor column of said
set of transistor columns includes a subset of pull-down transistors connected to said
output node, said subset of pull-down transistors processing a first phase displaced
25 clock signal, a second phase displaced clock signal immediately adjacent to said first
phase displaced clock signal, and a register bank signal.
5. The signal routing apparatus of claim 1 in combination with a programmable
logic device.
30
6. The signal routing apparatus of claim 5 wherein said programmable logic
device is connected to a system bus.

7. The signal routing apparatus of claim 6 wherein a memory is connected to said system bus.
8. The signal routing apparatus of claim 6 wherein a processor is connected to said system bus.
9. The signal routing apparatus of claim 6 wherein input/output circuitry is connected to said system bus.
10. The signal routing apparatus of claim 6 wherein a peripheral device is connected to said system bus.
11. A method of routing signals, comprising:
storing a set of data signals;
generating a set of phase displaced clock signals;
sequentially routing said set of data signals in response to said phase displaced clock signals to form sequentially routed signals; and
transmitting Low Voltage Differential Signaling mode signals corresponding to said sequentially routed signals.
12. The method of claim 11 wherein said storing step includes the step of storing said set of data signals in a register bank.
13. The method of claim 11 wherein said generating step includes the step of generating said set of phase displaced clock signals with a delay locked loop.
14. The method of claim 11 wherein said routing step includes the step of sequentially activating a set of transistor columns in response to said phase displaced clock signals.
15. A signal routing apparatus, comprising:

a Low Voltage Differential Signaling buffer to receive a set of Low Voltage Differential Signaling mode signals and produce a corresponding set of single ended signals;

a delay locked loop to generate a set of phase displaced clock signals;

- 5 a phase controlled write circuit connected to said Low Voltage Differential Signaling buffer and said delay locked loop to store said set of single ended signals in response to said phase displaced clock signals.

16. The signal routing apparatus of claim 15 further comprising a register bank
10 connected to said phase controlled write circuit, said register bank storing in parallel said set of singled ended signals.

17. The signal routing apparatus of claim 15 in combination with a programmable logic device.

ABSTRACT

A signal routing apparatus comprises a register bank to store a set of data signals. A delay locked loop generates a set of phase displaced clock signals. A phase controlled read circuit sequentially routes the set of data signals from the register bank
5 in response to the phase displaced clock signals. A Low Voltage Differential Signaling buffer connected to the phase controlled read circuit transmits the data signals in a Low Voltage Differential Signaling mode. The phase displaced clock signals operate in lieu of a higher clock rate in order to reduce power consumption.

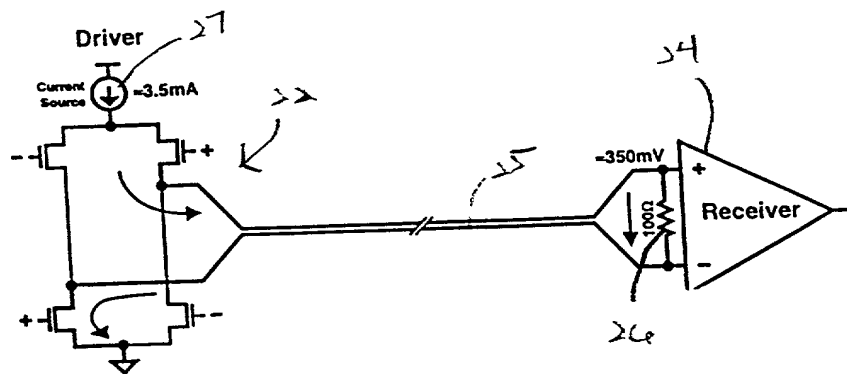


Fig. 1
(Prior art)

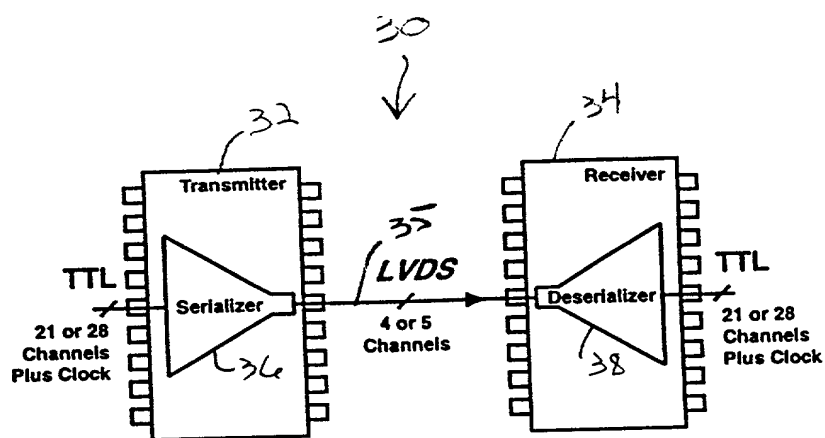


Fig. 2
(Prior art)

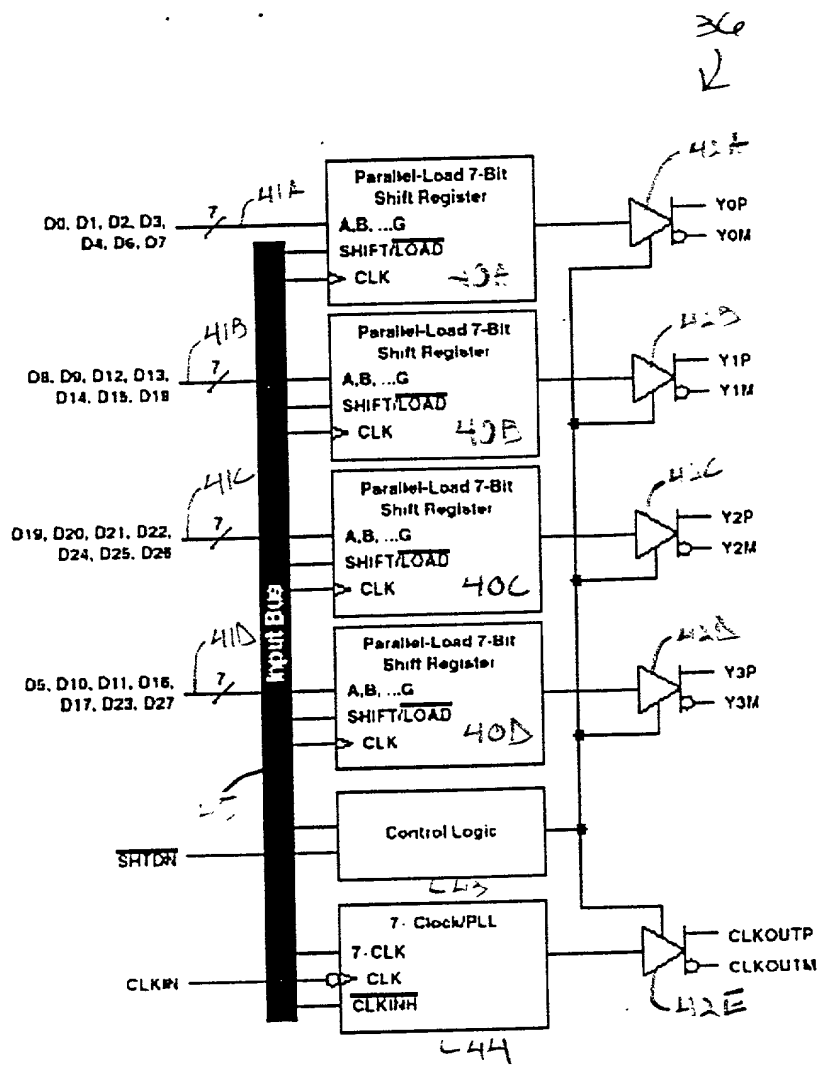


Fig. 3
(Motor AM)

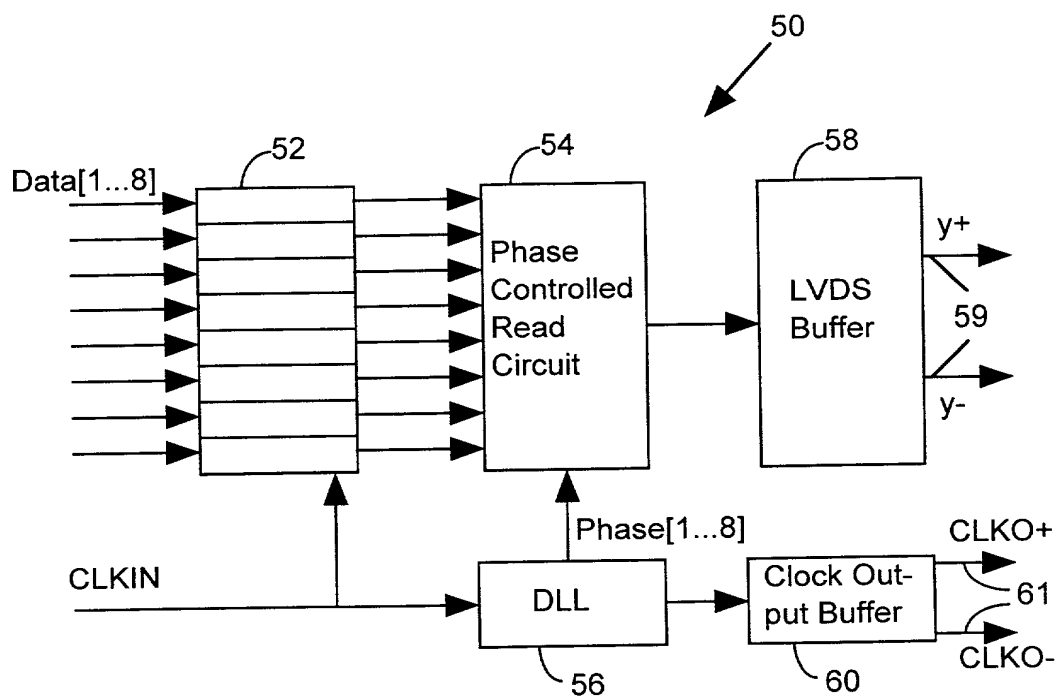


Figure 4

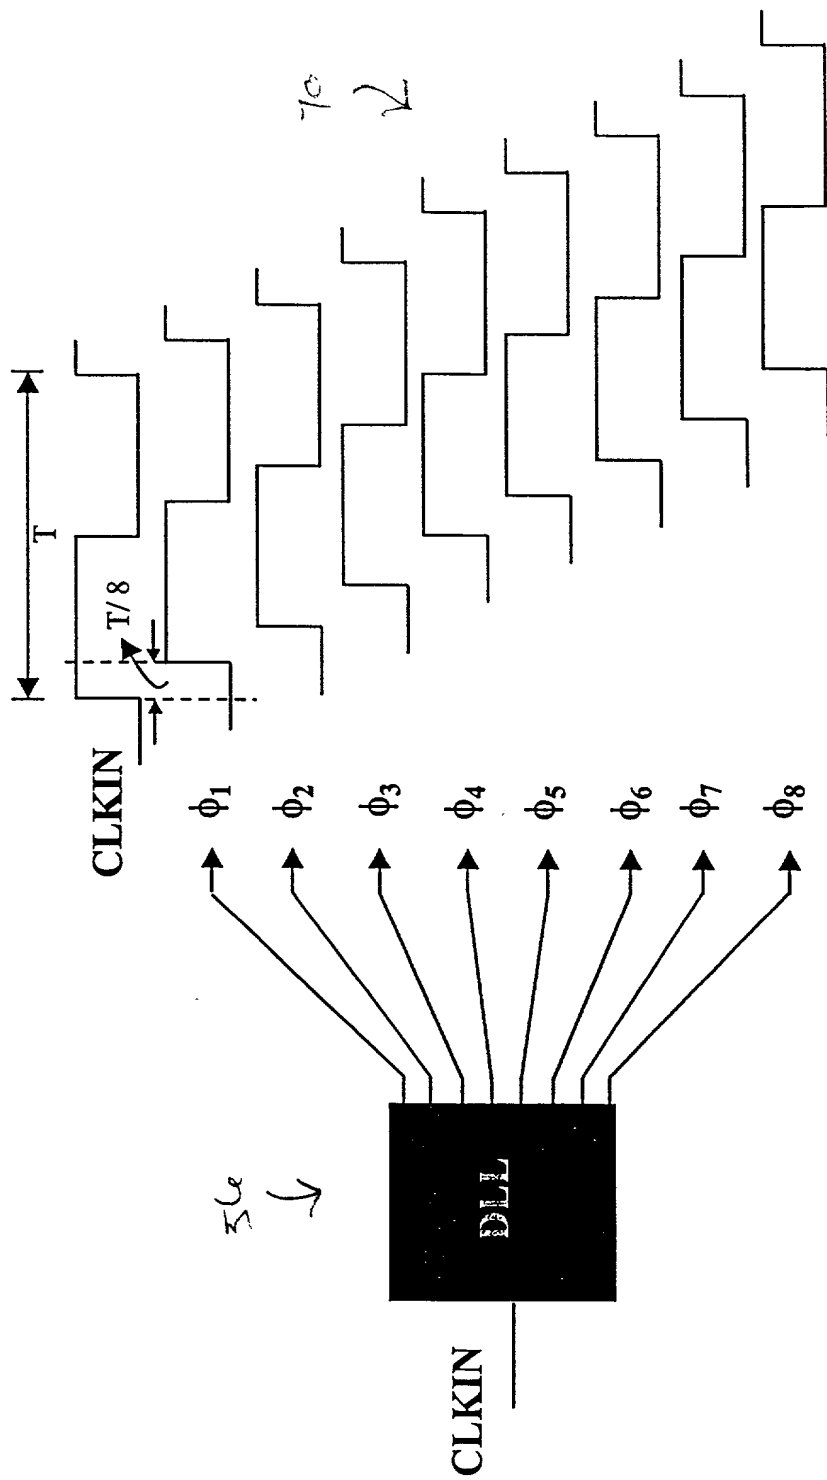


Fig. 5

54

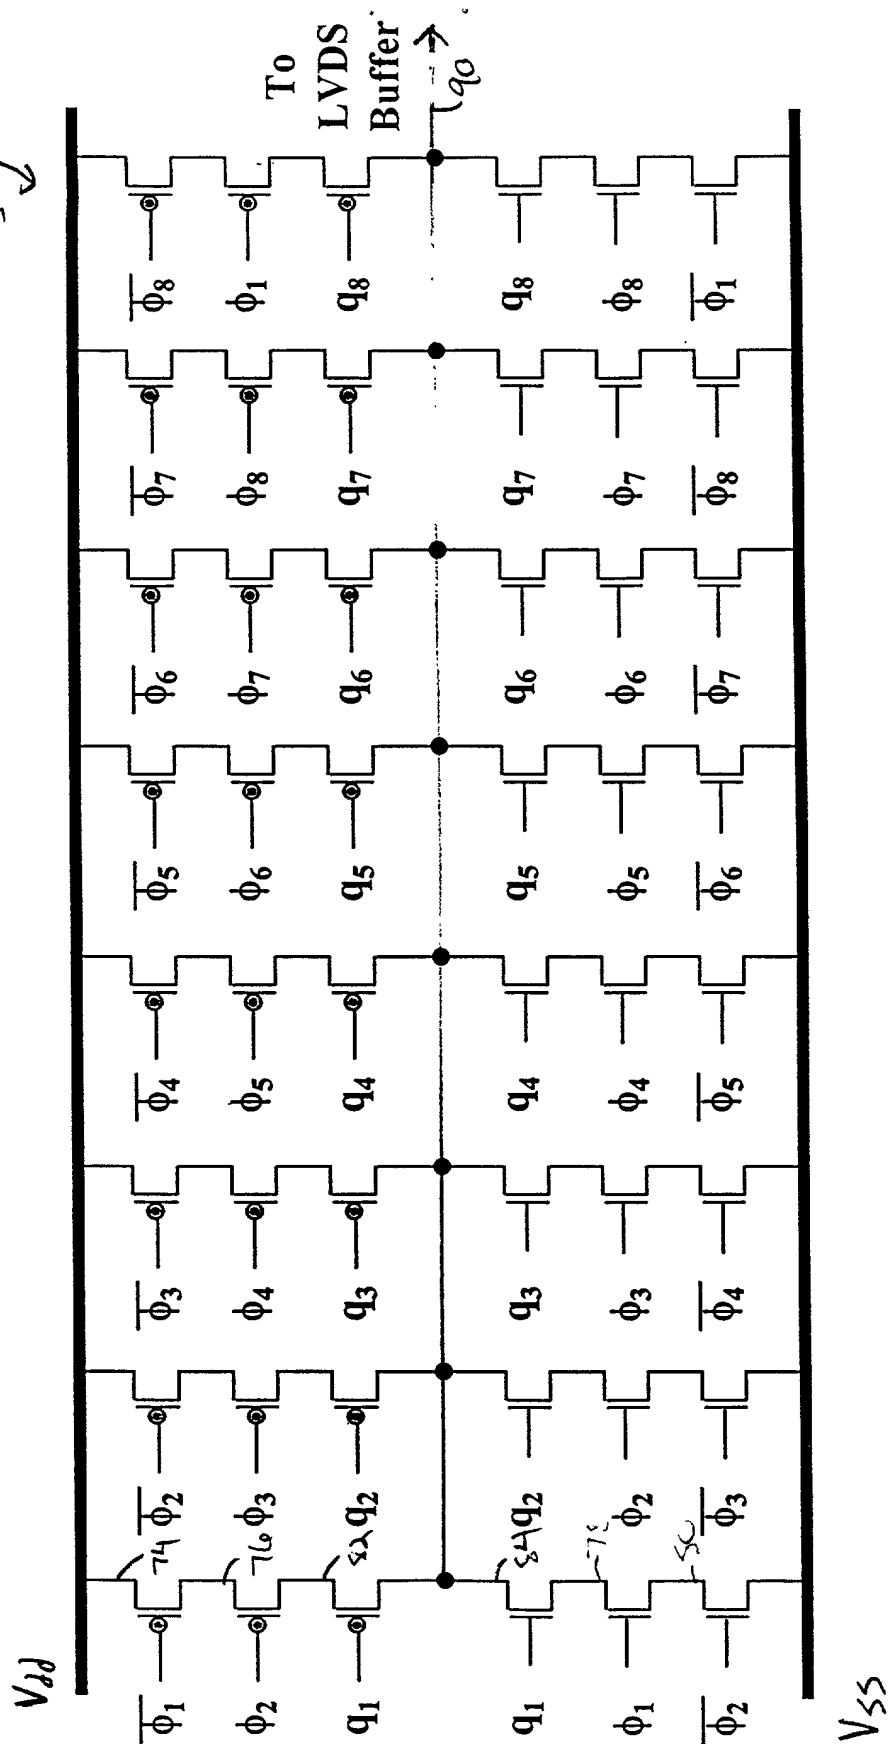


Fig. 6

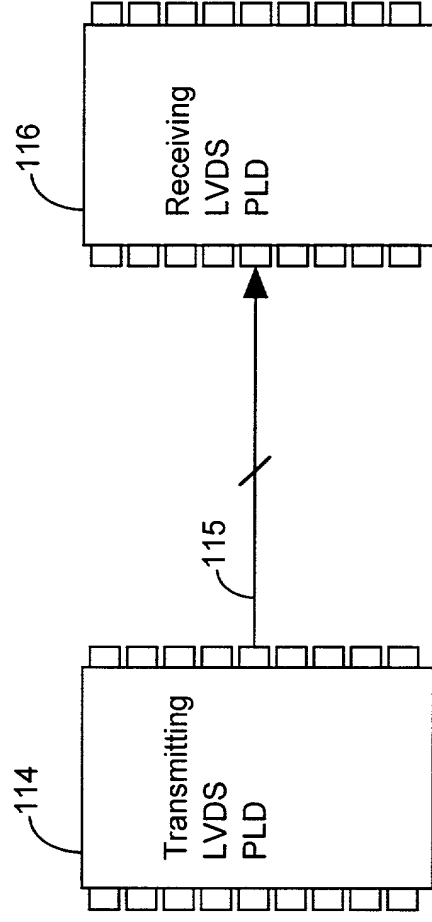


Figure 8

120

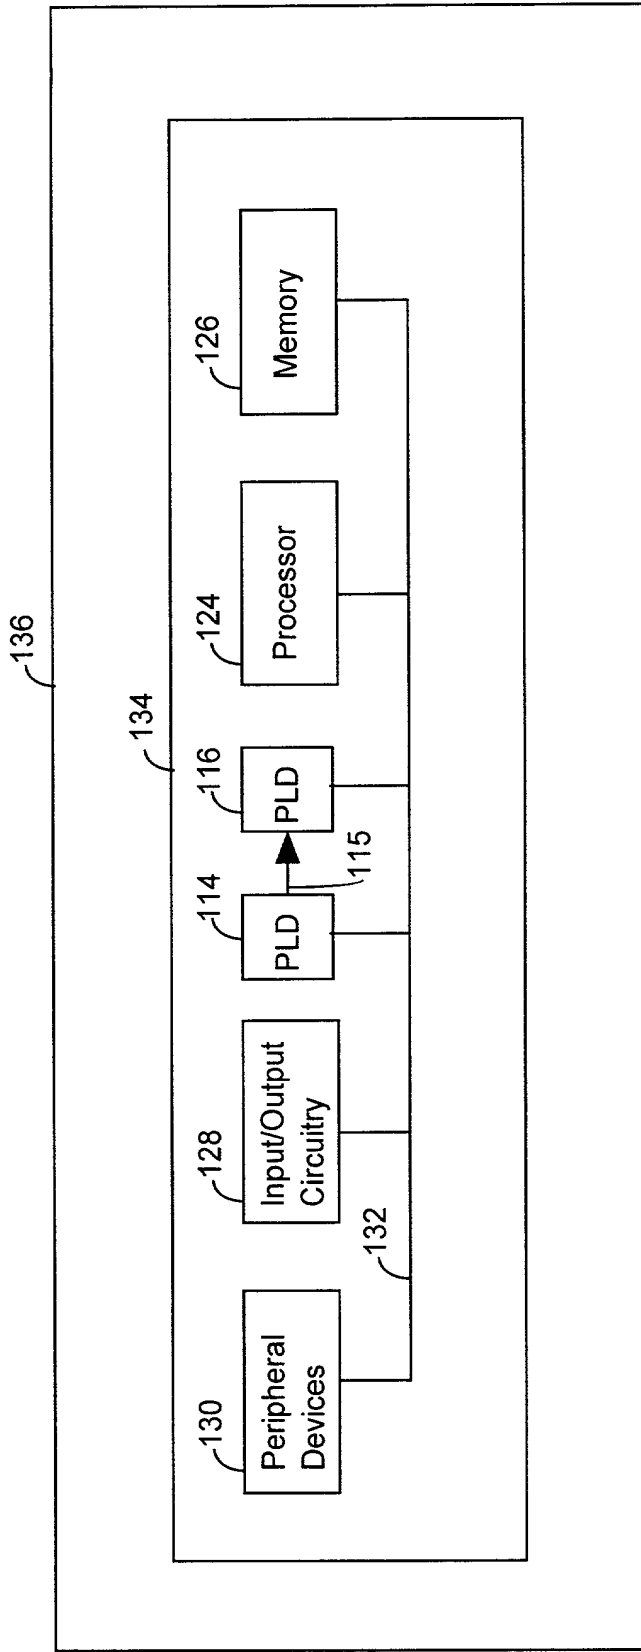


Figure 9

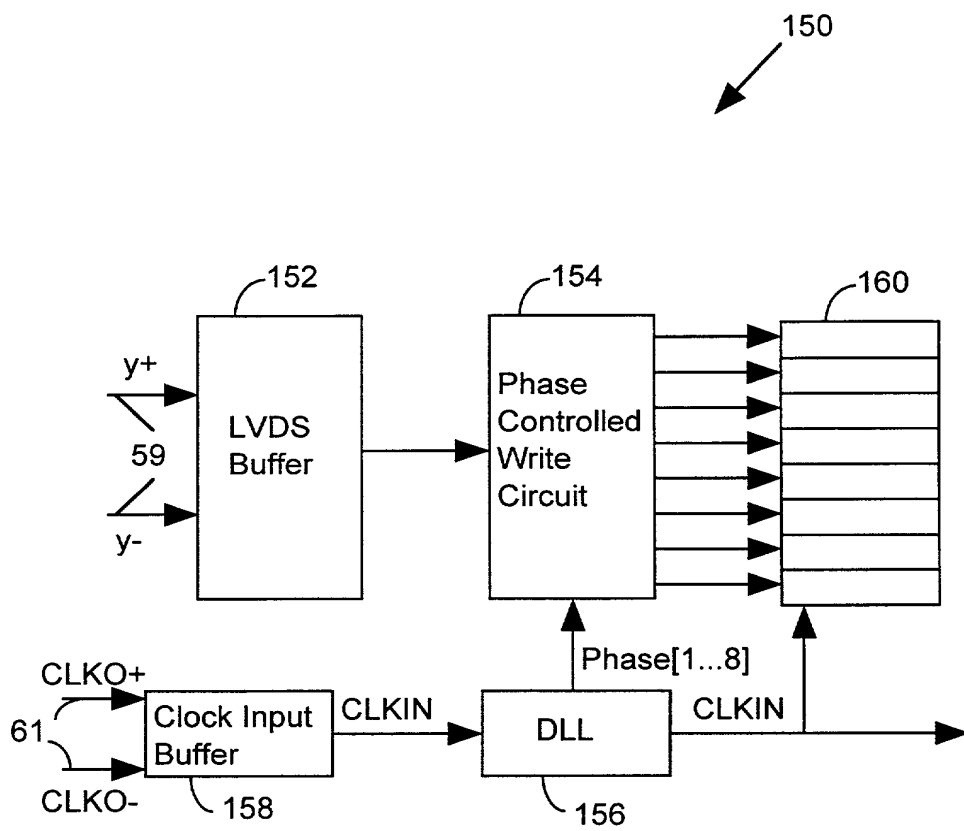


Figure 10

DECLARATION FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ***Apparatus and Method for Low Power Routing of Signals in a Low Voltage Differential Signaling System*** the specification of which

☒ is attached hereto.

☐ was filed on _____ as
Application Serial No. _____
and was amended on _____. (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)

(Country)

(Date Filed)

Yes ☐ No ☐

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

60/125,498
(Application Serial No.)

March 22, 1999
(Filing Date)

Direct all telephone calls to William S. Galliani at (650) 493-4935. Address all correspondence to:

PENNIE & EDMONDS LLP
3300 Hillview Avenue
Palo Alto, CA 94304

File No. 9818-026-999

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or
first inventor: Kerry Veenstra

Inventor's signature: _____

Date: _____

Residence: 1906 Conifer Court, San Jose, CA 95132

Citizenship: USA

Post Office Address: 1906 Conifer Court
San Jose, CA 95132

Full name of second joint
inventor, if any:

Krishna Rangasayee

Inventor's signature:

Date:

Residence:

917 Sierra Vista Avenue, #D, Mountain View, CA 94043

Citizenship:

India

Post Office Address:

917 Sierra Vista Avenue, #D

Mountain View, CA 94043

Full name of third joint
inventor, if any:

Robert Bielby

Inventor's signature:

Date:

Residence:

3722 Newton Way, Pleasanton, CA 94588

Citizenship:


United Kingdom

Post Office Address:

3722 Newton Way

Pleasanton, CA 94588

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

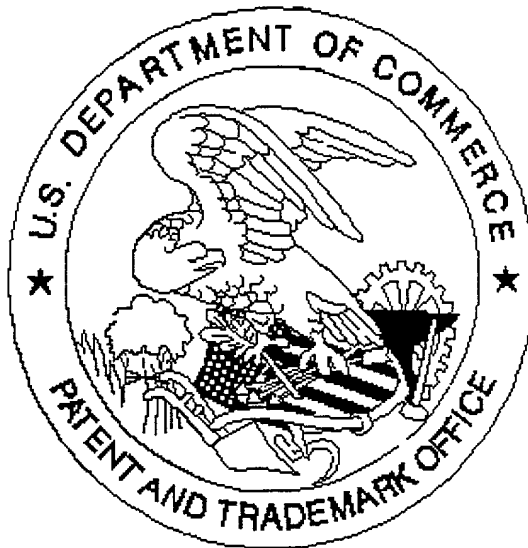

Application deficiencies were found during scanning:

☐ Page(s) _____ of TRANSIM-HA1 were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Scanned copy is best available.

OFFICE OF INITIAL PATENT EXAMINATION